

- Environmental quality •
- Obtain approbation •

Specialized in ecological environmental protection

Exquisite workmanship as core strength

Trustworthy quality and service of the brand

Courage to create a better living environment for the city

Jiangsu Mingxing Water Supply Equipment Co., LTD.

Address: 4F-Room A06, No.4369 Yinggang East Road, Greenland Plaza Hub, Shanghai, China

Tel: 86-515 8066 3333

Web: www.mxwatersupply.com

Improve the environment Serve the Environment



MingXing
— 铭星 —

Sewage Lifting Device

For villas, clubs, complexes, places that can't drain water by gravity

- ◆ Provide scheme design ◆ Single/Dual Pump
- ◆ Provide Customized Service ◆ Internal/External

Jiangsu Mingxing Water Supply Equipment Co., LTD



MingXing

— 铭星 —

Catalogue

Internal Lifter Series

WT mini	03
WT 100	05
WT 130	09
WT 180	13
WT 250	17
WT 300	21
WT 400	25
WT 500	29
WT 600	33
WT 1000	37

External Lifter Series

WT 20	41
WT 60	45
WT 80	49
WT 120	53
WT 150	57
WT 450	61
WT application cases	65

Product Model Description

	MingXing	60L	075	S
MingXing Sewage Lifting Pump				
Tank Capacity	60L 100L	120L 180L	150L 250L	450L 500L
Pump Watt	075=0.75kw 220=2.2kw	110=1.1kw 300=3.0kw	150=1.5kw 370=3.7kw	
Pump Quantity	S=Single D=Dual			


MingXing Mini Series



Performance Features

- ※ large diameter, large flow, strong conveying ability
- ※ New compact structure and small size design, easy to transport
- ※ Air filter and carburetor are dismountable for maintenance
- ※ After 24 hours of continuous operation, durability test time can up to 300 hours
- ※ Good sealing performance, can ensure long time operation with out water leakage.


Dimension 468*168*340mm

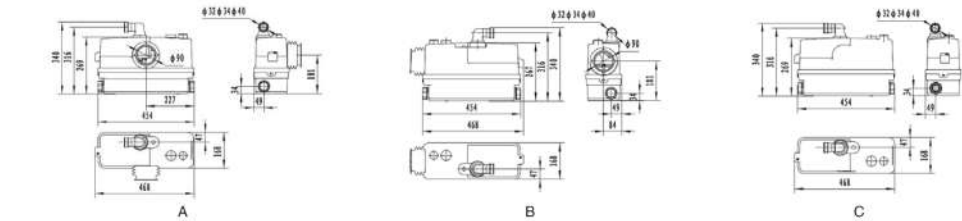

Application

Suitable for toilet of places below the sewer, such as basement, and the daily sewage discharge of shower room, bathtub, wash machine and other equipment that are far from the main drainage pipeline in places like household washroom and bathroom.


Model implication




Performance Parameter

Model	Watt		Q(m³/h) Q(L/min)	0	2.4	3.0	3.6	4.2	4.8	5.4	6
	kW	HP		0	40	50	60	70	80	90	100
Mini601A	0.6	0.8	H(m)	8.5	7	6.5	6	5.5	5	4.5	3.5
Mini601B	0.6	0.8		8.5	7	6.5	6	5.5	5	4.5	3.5
Mini601C	0.6	0.8		8.5	7	6.5	6	5.5	5	4.5	3.5

Product Structure

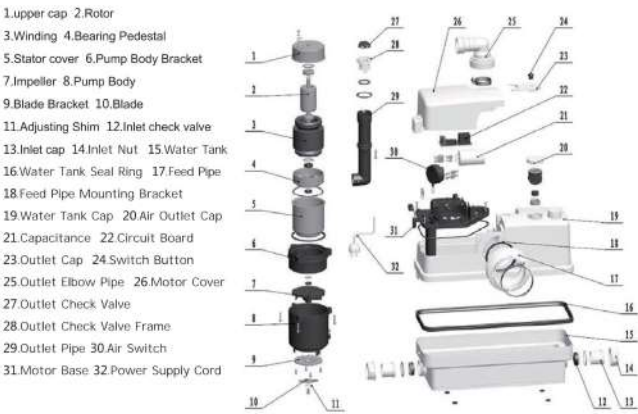


Performance Diagram

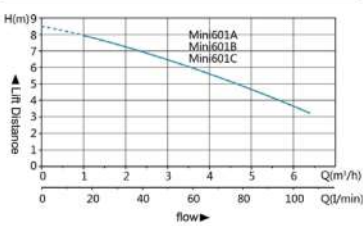

Packing

Model	L(mm)	W(mm)	H(mm)	G.W(kg)
Mini601A	505	215	300	6.5
Mini601B	530	190	300	6.5
Mini601C	530	190	300	6.4



MingXing 100 Series (Single Pump)




Product Description

Yonidan 100 series is the smallest volumetric pressure drainage equipment of sewage lifting equipment, suitable for collecting sewage and wastewater from closets, platform basin, showers, sink and other situations that can't drainage by gravity and then pump it to the main sewage pipe or outdoor sewage well. The Yonidan 100 series products are equipped with multiple pre-inlet. The water tank capacity is about 100L, which is completely airtight and durable, and can be installed and used in small space.

Application

It is suitable for single bathroom in villa basement, small catering basin, appended platform basin in shops, and etc.

Performance Diagram



Performance Parameter

- ※ One sewage pump installed inside
- ※ Corrosion-resistant PE water tank
- ※ Anchor port is equipped on water tank
- ※ Completely sealed, no odor emission
- ※ Coupling connection, convenient for maintenance
- ※ Multiple water inlets, easy to connect
- ※ Stainless steel check valve
- ※ Small size, convenient to install
- ※ All LCD control box



Technical Parameter

Model	Tank Capacity(L)	Inlet	Outlet	Breather Pipe	Weight(kg)
Yonidan100L075S	100	DN100	DN50	DN40	37
Yonidan100L110S	100	DN100	DN50	DN40	38


Selection Table

Model	Watt (KW)	Voltage (V)	Current (A)	Outlet Dia	Unit distance (m)	2	4	6	8	10	12	14	16	18
Yonidan100L075S	0.75	220	5.2	DN50	Flux (m³/h)	20	18	16	14	10	6			
Yonidan100L110S	1.1	220	6.6			24	22	20	18	15	10	5		
Yonidan100L075S	0.75	380	1.9			20	18	16	14	10	6			
Yonidan100L110S	1.1	380	2.6			24	22	20	18	15	10	5		


Accessories List

No.	Accessory	Model	Qty	Notes
1	Controller	NK-1	1	Standard Equiped
2	Ventilation Hose	DN40	1	Standard Equiped
3	Inlet Hose	DN100	1	Standard Equiped
4	Inlet Stop Valve	DN100	1	Optional
5	Outlet Stop Valve	DN50	1	Optional
6	Auxiliary pump outlet stop valve	DN40	1	Optional
7	Auxiliary Pump	/	1	Optional

Dimension 500*420*500mm

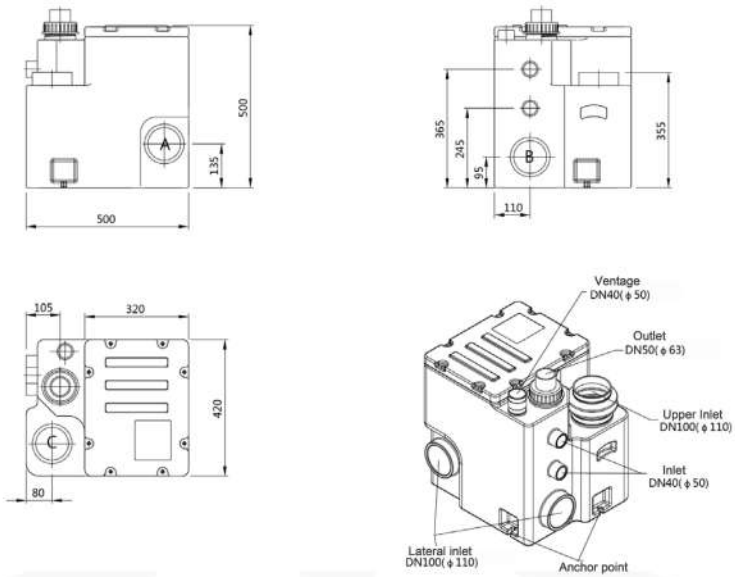

Installation Instruction

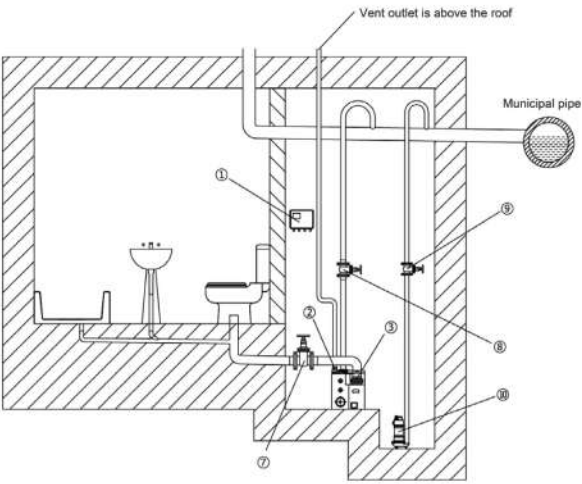

MingXing 130 Series (Single Pump)



Product Description


Yonidan 130 series sewage lifting equipment is designed to collect sewage from closetool, platform basins, showers, sewage basins, bathtubs, washing machines, etc. in situations that can't drainage by gravity, and then pump it to the main sewage pipe or outdoor sewage Wells.

The Yonidan 130 series products are equipped with multiple pre-inlet. The water tank capacity is about 120L, which is completely airtight and durable, and can meet different installation conditions.

Application

Suitable for western-style house, villa basement (with laundry), club, small public toilet and etc..

Performance Diagram

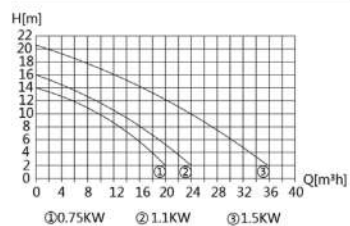

Performance Features

- ※ One sewage pump installed inside
- ※ Corrosion-resistant PE water tank
- ※ Anchor port is equipped on water tank
- ※ Completely sealed, no odor emission
- ※ Coupling connection, convenient for maintenance
- ※ Multiple water inlets, easy to connect
- ※ Stainless steel check valve
- ※ Small size, Wide application
- ※ All LCD control box

MingXing
— 铭星 —

